

CUSTOMER NO. 25732

JC07 Rec'd PCT/PT 2 MAY 2005

PCT #3

Docket No.: 45051-00026USPX
(PATENT)



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Patent Application of:
Peter Malm

Application No.: 10/520044

Confirmation No.: N/A

Filed: December 30, 2004

Art Unit: N/A

For: METHOD FOR ITERATIVE DECODER
SCHEDULING

Examiner: Not Yet Assigned

CLAIM FOR PRIORITY

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

I hereby certify that this correspondence is being deposited with the U.S. Postal Service with sufficient postage as First Class Mail in an envelope addressed to: Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450, on the date shown below.

Dated: April 28, 2005

Signature: 

(Margo Barbarash)

Dear Sir:

Applicant hereby claims priority under 35 U.S.C. 119 based on the following prior foreign application filed in the following foreign country on the date indicated:

| <u>Country</u> | <u>Application No.</u> | <u>Date</u> |
|----------------|------------------------|--------------|
| Sweden | 0202035.2 | July 1, 2002 |

Dated: April 28, 2005

Respectfully submitted,

By 

Ross T. Robinson

Registration No.: 47,031

JENKENS & GILCHRIST, A PROFESSIONAL
CORPORATION

1445 Ross Avenue, Suite 3200

Dallas, Texas 75202

(214) 855-4500

Attorneys For Applicant

01520044

Rec'd PCT/PTO 30 DEC 2004

PCT/EP 03/06798

PRV

PATENT- OCH REGISTRERINGSVERKET
Patentavdelningen

Intyg
Certificate

REC'D 12 AUG 2003

WIPO PCT

Härmed intygas att bifogade kopior överensstämmer med de handlingar som ursprungligen ingivits till Patent- och registreringsverket i nedannämnda ansökan.

This is to certify that the annexed is a true copy of the documents as originally filed with the Patent- and Registration Office in connection with the following patent application.

(71) Sökande Telefonaktiebolaget L M Ericsson (publ), Stockholm
Applicant (s) SE

(21) Patentansökningsnummer 0202035-2
Patent application number

(86) Ingivningsdatum 2002-07-01
Date of filing

Stockholm, 2003-07-24

För Patent- och registreringsverket
For the Patent- and Registration Office



Juris Rozitis

Avgift
Fee 170:-

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

PATENT- OCH
REGISTRERINGSVERKET
SWEDEN

Postadress/Adress
Box 5055
S-102 42 STOCKHOLM

Telefon/Phone
+46 8 782 25 00
Vx 08-782 25 00

Telex
17978
PATOREG S

Telefax
+46 8 666 02 86
08-666 02 86

BEST AVAILABLE COPY

METHOD FOR ITERATIVE DECODER SCHEDULING

5 **Technical Field of the Invention**

The present invention relates to communication systems where decoders are used to decode an incoming stream of data blocks. More specifically, the method according to the invention relates to a way of scheduling
10 the data blocks to a number of iterative channel decoders in a cluster for minimizing the number of decoders needed for a certain bitstream. Also, the present invention relates to an electronic communication apparatus comprising a number of decoders, which is adapted to the method of the
15 invention.

Description of the Prior Art

An electronic communication apparatus as set out above can for instance be a mobile or cellular telephone
20 i.e. for UMTS ("Universal Mobile Telecommunication System"), a communicator, an electronic organizer, or a smartphone.

In the evolution of WCDMA ("Wide-band Call Division Multiple Access") a new concept called High Speed Downlink
25 Packet Access (HSDPA) has been proposed, which features a High Speed Downlink Shared Channel (HS-DSCH). One main feature of HSDPA is the introduction of an ARQ-protocol on the physical layer (Layer 1, L1), i.e below the Radio Link Control (RLC) protocol, may apply an ARQ-protocol for error
30 correction.

The ARQ-protocol in HSDPA is introduced at L1 to avoid RLC retransmissions introducing considerable Round Trip Time (RTT). In addition to being large, the RLC-induced RTT varies in length. The result is that higher-
35 layer protocols, in particular TCP, degrades the end-to-end

throughput of the transmission link as a result of the large and varying RTT.

The new ARQ-protocol introduced on L1 is intended to correct the majority of the channel errors before they trigger RLC-retransmissions. The end-to-end throughput is then preserved since TCP experiences a less varying, and shorter, RTT. However, it is a prerequisite that the RTT of HS-DSCH on L1 is as small as possible. One large contributor to the RTT is the iterative decoding process in the electronic communication apparatus. Consequently, it is preferred that the decoding process is as fast as possible.

The HSDPA mode features downlink bitrates up to 15 Mbps conveyed by turbo-coded data packets. This implies that more than one decoder may have to be employed in the electronic communication apparatus for decoding the high bitrate. However, an iterative decoder implementation is quite large and expensive. Every additional decoder adds complexity to the communication apparatus and demands a lot of chip area.

To be able to fully handle the bitrates of HSDPA, up to 10 decoders are needed if a conventional decoding technique is used. As the iterative decoding process of the mobile telephone can be a large contributor to the RTT, each additional decoder may significantly increase the RTT of the decoding process. Also, each additional decoder will increase the cost and the power consumption of the communication apparatus.

Summary of the Invention

It is an object of the present invention to provide a method for implementing a decoder process being capable of decoding an incoming stream of coded data blocks received with a high bitrate. More specifically, it is an object of the method according to the invention to minimize the number of decoders required for receiving the high bitrate

of data blocks and optimizing the utilization of the decoders.

Further, it is an object of the method according to invention to reduce the complexity, power consumption, and
5 cost of the decoder implementation of an electronic portable communication apparatus.

Another object of the invention is to provide an portable electronic communication apparatus adapted for decoding an incoming stream of data blocks, which are
10 received with a high bitrate. Also, it is an object of the invention to provide an apparatus having low decoder complexity, low power consumption, and low cost, and which utilizes the decoders efficiently.

The above objects have been achieved by a method,
15 according to which it is possible to store an incoming data block in a queue, if all decoders of a cluster of iterative decoders are unavailable. The first decoder being available takes on the first data block in the queue. Further, the data block is transmitted according to a HARQ-protocol,
20 which provides the possibility to store unsuccessfully decoded data blocks. Therefore, an unsuccessfully decoded data block is moved to the end of the queue and combined with a retransmitted block of data before processed in any of the decoders of the cluster once again. The storing, combining, and decoding process proceeds until an ACK-
25 report can be communicated to a transmitter of the coded data block.

By scheduling the received blocks according to the method of the invention it is possible to minimize the
30 number of decoders required for a certain received bitrate. Specifically, according to the inventive method the high-speed bitrate associated with HSDPA can be received and decoded with fewer decoders, preferably two or three, than would be the case if the decoder-count was dimensioned for
35 the worst case. The worst case is when all received blocks

are iterated in the decoder a maximum number of iterations even if a CRC (cyclic redundancy check) checks after a few iterations. According to the invention, CRC is checked after each decoder iteration and further iterations are canceled as soon as the CRC checks. In this way, the decoder utilization is enhanced compared to if the maximum number of iterations is done. Consequently, the number of decoders that needs to be deployed for a certain bitrate can be minimized.

The above objects are also achieved by an electronic communication apparatus capable of decoding data blocks received over a wireless link in a communication network. The inventive apparatus comprises a queue, which is adapted for temporarily storing the data blocks, and a cluster of decoders, which is adapted to decode the data blocks when any of the decoders of the cluster is available. Advantages of the apparatus according to the invention are low complexity, low cost, and low power consumption.

Further preferred features of the invention are defined in the dependent claims.

It should be emphasized that the terms "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps or components but does not preclude the presence or addition of one or more other features, integers, steps, components or groups thereof.

Brief Description of the Drawings

A preferred embodiment of the present invention will now be described in more detail with reference to the accompanying drawings, in which:

FIG 1 shows a mobile telephone according to the present invention operatively connected to a communication network;

FIG 2 is a schematic diagram of a structure of a stack of protocols in the mobile telephone and the communication network, respectively;

FIG 3 is a block diagram of a queue and a cluster of decoders arranged according to the invention;

FIG 4 illustrates three different coded data blocks;

FIG 5 is a flowchart of the scheduling of the decoding process according to the present invention; and

FIG 6 is an exemplifying timing diagram of the decoding process according to the invention.

Detailed Description of Embodiments

FIG 1 is intended to illustrate a portable communication apparatus embodied as a mobile telephone 1, in which the present invention is incorporated. The mobile telephone 1 comprises an antenna 10, which in a conventional way is used for connecting the mobile telephone 1 to a communication network 21, over a wireless link 21, through a base station 22. In a well-known way, the communication network 21, for instance a UMTS network, offers voice, data and fax call services to the user of the mobile telephone 1. Also, the mobile telephone 1 may have access to additional applications such as internet/intranet, videoconference, news push, networked games and video telephone through the communication network 21. Furthermore, the mobile telephone 1 is adapted to receive (e.g. from a transmitter of the base station 22) and decode an incoming stream of data block having a bitrate of up to 15 Mbps. According to the method of the invention, the received data blocks are put in a queue and then scheduled on a pool of decoders, as will be described in the following.

Further, the mobile telephone 1 comprises a display 11, a loudspeaker 12, a microphone 13 and a keypad 14, all

in a well-known way for creating an interface for using the mobile telephone 1.

Further, the mobile telephone 1 comprises a receiver and a transmitter for exchanging data with the communication network 21 through the base station 22.

The mobile telephone 1 and the communication network 21 support High Speed Downlink Packet Access (HSDPA), which features downlink bitrates up to 15 Mbps conveyed as turbo-coded packets.

FIG 2 shows a simplified stack of protocols 31-35 for WCDMA, which are arranged in the mobile telephone 1. As is also shown in FIG 2, the communication network 20 comprises in a similar fashion a stack of protocols 41-46 corresponding to the protocols 31-36 of the mobile telephone 1. The protocols 31-36 and 41-46 facilitate the exchange of data with the high bitrate between the mobile telephone 1 and the communication network 21, as is well known and will not be further discussed herein.

An RLC protocol 33, 43 provides, at least in acknowledged mode, ARQ-functionality 50 between peers, that is between the RLC layers 24, 44 of the mobile telephone 1 stack and the communication network 21 stack respectively, as is indicated by a first two-way arrow in FIG 2.

Further, a second ARQ-protocol 51 is provided between the physical layers (layer 1, L1) 36, 46 of the mobile telephone 1 and the communication network respectively, indicated by a second two-way arrow in FIG 2. More specifically, the physical layer of the communication network 21 is situated at the base station 22 in FIG 1. The second ARQ-protocol 51 controls the transmission of data between the base station 22 and the mobile telephone 1. This second ARQ-protocol provides Hybrid ARQ (HARQ) functionality. The HARQ-protocol 51 allows the mobile telephone 1 a certain processing time, and the received coded data blocks 61, 63 can therefore be stored in a queue

71 while they await decoding in any of the decoders in a decoder pool 72. The data blocks 61, 63 represents various types of coded data, e.g. voice, video and data, which will be further disclosed in the following. Also, if the
5 decoding fails, the HARQ-protocol 51 requires a NACK (Not ACKnowledged) report to be sent to a receiver in the base station 22. The NACK information is then conveyed to a HARQ-controller in the base station, which retransmits the failed blocks 62. Meanwhile, the data block 61, 63 that was
10 unsuccessfully decoded can be stored in a memory of the mobile phone 1 for subsequent combining with a retransmitted data block 62 from the base station 22. This will be discussed further below. By sending ACK/NACK reports between the L1 36, 46 of the mobile phone 1 and the
15 base station 22, respectively, channel errors can be corrected without involving the ARQ-protocol 50 of the RLC-layer 34, 44. This stabilizes the RTT on the RLC-level.

FIG 3 illustrates a decoder implementation according to the present invention. A local memory, such as a RAM
20 memory or a flash memory, is provided in the mobile telephone 1 for implementing a queue 71 for temporarily storing the data blocks 61, 63 awaiting decoding, and possibly combining with a retransmitted data block 62. The queue 71 can be administrated and controlled by a central
25 processing unit 75 (CPU) implemented by any commercially available microprocessor, or another type of programmable logic circuitry. Therefore, the CPU 75 is connected to the queue 75.

The queue 71 is connected to a cluster 72 of decoders
30 having a number (N_{td}) of individual decoders, which are arranged in a parallel configuration. By arranging the decoders in parallel, each decoder can receive a complete coded data block 61, 63 and process it independently of all the other decoders of the cluster 72. In this embodiment,
35 preferably two or three turbo-decoders are utilized.

However, any number of iterative decoders, which can be arranged in parallel, can be provided in the cluster 72 and implemented according to the present invention. As a consequence of the parallel arrangement of the decoders it is possible to shut off some of the decoders when the bit rate does not demand service from all decoders, and thus power can be saved. This and the overall control of the queue 71 and the decoder cluster 72 will be handled by the CPU 75. Consequently, the CPU 75 is also connected to the decoder cluster 72.

Further, two feedback-loops 73, 74 provide the possibility to move the first data block 61, 63 of the queue 71 or a data block 61, 63 in the cluster 72 of decoders, respectively, to the queue 71 if either the HARQ protocol demands an ACK/NACK-report and the block 61, 63 has not been tried on the decoder, or if the block 61, 63, is in the process of decoding but it has not passed CRC (cyclic redundancy check) yet.

In the UMTS-standard the encoder architecture type used is referred to as Parallel Concatenated Convolutional Code. In the UMTS-specification the encoder comprises two 8-state constituent encoders and one interleaver. Data coded according to this standard can be decoded using an iterative decoding technique, such as a turbo decoder implementation. The service time in an iterative decoder is random, which makes it advantageous to cluster a set of decoders.

FIG 4 illustrates the coded data block 61, relating to a bit stream representing data such as voice, video, fax etc., which is input to a transmitter. The data block 61 will be decoded by any of the decoders of the cluster 72. Also, a retransmitted coded data block 62, and a combined coded data block 63, which is also to be decoded by any of the decoders of the cluster 72, is illustrated. The lines of the blocks 61, 62, 63 correspond to coded bits of said

blocks. However, it should be noted that there usually are much more bits in a coded block than indicated in FIG 4, as the blocks of FIG 4 merely are illustrative. The retransmitted data block 62 relates to the same information bits as the first data block 61. The combined data block 63 comprises the bits of the first and retransmitted data blocks 61, 62. The first data block 61 comprises certain coded bits, indicated by lines in the first data block 61 in FIG 3. Also, the retransmitted data block 62, which relates to the same information bits as the first data block 61, may comprise other coded bits that are indicated by lines in the second data block 62 in FIG 4.

The retransmitted data block 62 is combined with the stored first data block 61 upon reception by, e.g., summing the loglikelihood ratios of the received coded bits. As is understood, there may be more than one retransmission where each retransmitted block may necessarily not comprise the same coded bits. The combination forms the combined data block 63, which may contain more coded bits than data blocks 61 and 62, respectively. However, some coded bits may overlap between block 61 and 62, which is indicated by lines in the third data block of FIG 3. When the combined data block 63 is formed, it replaces the first data block 61 in the queue 71. Thereafter it is ready for decoding in any of the decoders of the cluster 72. A combined data block 63 being unsuccessfully decoded can once again be combined with a retransmitted data block for subsequent decoding.

The combination of data blocks 61, 62, 63 has the advantage that the probability of correct decoding increases in many cases, depending on the radio channel conditions, with every retransmission and combination.

The data block 61, 63 currently undergoing the decoding process can be checked after each iteration for errors by e.g. a CRC (Cyclic Redundancy Check) sequence.

According to the invention, CRC is checked after each decoder iteration and further iterations are canceled as soon as the CRC checks. The probability that the data block is error-free increases fast with the number of iterations.

5 However, it should be noted that if the decoding of the data blocks 61, 63 is not successfully completed after about 3 iterations it is unlikely that the decoding will succeed without a retransmission. As a consequence of this, the iterative decoding process of the present invention can
10 be aborted prematurely at any stage of the decoding.

Instead, the processed data block 61, 63 can be stored in the queue 72 and a retransmission of the data block 61, 63 is requested by the mobile telephone 1 by transmitting a NACK-message to the base station 22.

15 If the maximum number of iterations is reached, the iterative process of the decoder is unconditionally aborted and the data block 61, 63 presently undergoing decoding is moved to the back of the queue 72 and a retransmission of the data block 61, 63 is requested. The retransmitted data
20 block can then be combined with the locally stored data block 61, 63, as set out above, before decoding of the combined block 63 commences, which increases the probability for correct decoding.

A method for scheduling the decoders of a mobile
25 telephone 1 according to the invention will now be explained in detail.

The scheduling method according to the invention combine the possibility to retransmit data blocks 62 and the possibility to abort the iterative decoding process of
30 a data block 61, 63 undergoing processing. Also, it is possible to shut off some of the decoders of the cluster 72 as discussed above. This will make use of the iterative decoder resources of the mobile telephone 1 as efficiently as possible. FIG 3 shows a schematic block diagram of the
35 queue 71 and the cluster 72 of decoders. A number of turbo

decoder are utilized in this embodiment, preferably two or three decoders, for the 15 Mbs bitrate data stream. The HARQ-protocol 51 on L1 46 of the transmitter of the base station 22 requires the decoding to be finished within a predetermined time-period, after which said transmitter requires an ACK/NACK-report of the decoding process from the receiver of the mobile telephone 1.

Reference is now made to FIG 5, illustrating in a block diagram the possible scheduling and processing of the data blocks 61, 63 awaiting decoding. First, the data block 61 is received at 100 by the receiver of the mobile telephone 1 and stored in the queue 1. Depending on the queuing time it is decided at 102 whether a retransmission is necessary. If so, a retransmission occurs, and the retransmitted block 62 and the queued block 61 are then combined at 102 to a combined block 63 and further processed at 103. If retransmission is not necessary, the coded data block 61 is transferred directly to 103, where it is determined whether any decoder is available. If so, the block 61, 63 is moved to any of the decoders being available for decoding at 104. Otherwise, the data block 61 is moved to the queue at 105.

If the block 61 is stored at 105, it is determined at 106 whether the time limit is reached before the data block 61, 63 is moved to any of the decoders. The outcome of this determination results in four different cases:

In the first case, if the time limit is reached before any decoder is available, the data block 61, 63 is moved to the end of the queue 72, as is also indicated by the first feedback-loop 73 of FIG 3. Also, an NACK-report is sent at 107 to the transmitter of the base station 22, which triggers a transmission of the retransmitted data block 62.

In the second case, if the time limit is not reached, the data block 61 is moved to any of the decoders of the

cluster 72 for decoding at 104. Then, it is determined whether the decoding is successful within the time limit at 108. A successful decoding will trigger an ACK-report at 109 to be transmitted from the mobile telephone 1 to the transmitter of the base station 22.

In a third case, if it is determined at 108 that the decoding at 104 is not finished (i.e. unsuccessful decoding) within the time limit, a NACK-report is transmitted at 107 to the transmitter of the base station 22. Also, the data block 61 is moved to the end of the queue 71, which is indicated with the second feedback loop 74 in FIG 3.

In the fourth case, if it is determined at 108 that the data block 61 is unsuccessfully decoded, or the maximum number of iterations is reached, within the time limit, and a NACK-report is transmitted at 107 from the mobile telephone 1 to the transmitter of the base station 22. Also, the data block 61 is moved to the end of the queue 71, as is indicated with the second feedback loop 74 in FIG 3.

It should also be noted that it is possible to abort the decoding process at 104 prematurely, such as after 2-3 iterations as discussed above, in case the CRC checks.

If a data block 61 is moved to the end of, and stored in, the queue 71, the combination with the retransmitted block 62 to a combined block 63 occurs during the queuing. Then the combined block 63 is processed according to the steps 106, 107, 104, 108 until the decoding is successfully completed and the ACK report is transmitted at step 108.

In case a failed decoding is likely then it may be preferred to interrupt the iterative process in the decoder, and instead request a retransmission. After a fast retransmission from the base station 22 the retransmitted data block 62 can be combined with the data block 61 stored in the queue 71 and the combined data block 63 can be

decoded instead. In most cases the performance with a quite small number of iterations, preferably 1-3, is satisfactory, and the scheduling method according to the invention exploit this possibility by automatically
5 adapting, i.e. increasing or decreasing, the maximum number of iterations (N_{iter}) in the decoders depending on the bitrate received. Therefore, the scheduling of the decoding process according to the invention provides the possibility to support high bit rates with a limited number of
10 decoders.

If the decoding of the data blocks 61, 63 are unsuccessful, or the data blocks 61, 63 is not moved to any of the decoders within the time limit, the data blocks 61, 63 will be moved to the back of the queue 71 as set out
15 above. When the transmitter of the base station 22 receives the ACK/NACK-report it determines weather to retransmit a specific data block 61, 63 (NACK) or transmit a new block (ACK). If a NACK-report is received a data block 62 will be prepared and transmitted to the mobile telephone 1. When
20 the retransmitted data block 62 is received by the mobile telephone 1, the retransmitted data block 62 is combined with the stored data block 61, 63 to a combined data block as set forth above. This combined data block 63 has an improved probability of being successfully decoded, as the
25 combined block 63 comprises more energy and/or parity bits. A data block 61, 63 can be combined several times, whereby the probability for successful decoding increases after each combination.

An important feature of the present invention is if
30 many data blocks 61, 63 fail to reach the cluster 72 of decoders before they are moved to the back of the queue 71. In such a case, the maximum number of allowed iterations N_{iter} of the decoders could be decreased automatically, e.g. by the CPU 75. In this embodiment, the adaptation of the
35 maximum number of iterations in each decoder is changed

automatically by the CPU 75 when the number of blocks 61, 63 being moved from directly from the beginning of the queue 71 to the end of said queue 71 reaches predefined indices. However, as is realized by the man skilled in the art the adaptation is not necessary at all or can be implemented differently. This results in decreased probability of correctly decoded data blocks 61, 63, but it also decreases the decoding time, i.e. more data blocks 61, 63 can be tried on the cluster 72 of decoders per time unit. The optimum number of iterations N_{iter}^{opt} in each decoder of the cluster 72, and the indices, is a design parameter, which can be set differently depending on the current link 20 quality as well as on the mobile telecommunication network 21 operator's preferences.

FIG 6 shows an simulation of a decoding operation when a N-staggerd Stop and Wait protocol with N=6 different lines is used for simulating the HARQ-protocol 51 on L1 36, 46. The scheduling scheme for the decoding process according to the invention is utilized with one decoder. The offered bitrate is 2.88 Mbps and the code rate is R=0.5 in an AWGN ("Additive White Gaussian Noise") channel. For simplicity, only one decoder is used. However, as discussed previously in this document it may be necessary to provide more than 1 decoder to support a bitrate of up to 15 Mbps.

In FIG 6 the decoding time, which includes a number of iterations, is outlined by a line starting with a circle. The time limit when it is necessary to send the ACK/NACK-report to the transmitter is marked by a rhomb. A successful decoding is marked by a circle after the line, while an unsuccessful decoding is marked by a square.

When the receiver of the mobile phone 1 receives the data blocks 61, they are stored in the queue 71 if no decoder is available. As can be seen in FIG 6, the first arriving data block 61 can be directly moved to the decoders without intermediate storing in the queue 71. The

storing is symbolized by a gap between the starting circle and the completed reception of the data block 61, 63. However, at the time data blocks number 2-6 are received, the decoder is not available and consequently the data blocks 61 have to be stored in the queue 71. The data blocks 61 are then fed to the decoder according to an "oldest-first" rule.

The decoding of the first data block 61 is finished within the time limit but is unsuccessful. Consequently, a NACK-report is transmitted to the transmitter of the base station 22, and the data block 61 is moved to the end of the queue 71. Said transmitter receives the NACK-report and prepares and retransmits the first data block as a retransmitted data block 62. This corresponds to the fourth case of FIG 5.

The decoding of the third data block 62 is not finished within the time limit, and a NACK-report is sent to the transmitter. This corresponds to the third case of FIG 5.

The first case of FIG 5, i.e. the data block 61 is not moved to the decoder within the time limit, occurs the first time the sixth data block of FIG 6 is to be decoded. As FIG 6 discloses the operation of the decoder, the sixth data block 61 is not present in FIG 6 during the first round of its intended decoding. However, a NACK-report is transmitted to the transmitter of the base station 22, which triggers a retransmission. Therefore, the first time the sixth data block appears it is a combined data block 63.

Finally, the second case of FIG 5, i.e. the decoding is successful within the time limit, occurs when the second data block has been combined with a retransmitted data block 62, and the combined data block 63 is decoded for the first time. Consequently, an ACK-report is transmitted to

the transmitter of the base station 22, which then can transmit a seventh data block 61 over line two.

In the embodiment for the simulation result of FIG 6, the "oldest first" rule is used, i.e. priority is given to the data block 61, 63 in the queue having the longest waiting time. This result in that the sixth data block in FIG 6 is skipped in the first round, as discussed above. However, in another embodiment it is equally well possible to move the data blocks 61, 63 from the queue to the decoders according to any other principle, e.g. Last in First Out (LIFO), as long as the data block 61, 63 has been combined with a retransmitted data block 62.

From FIG 6 it is evident that the scheduling method according to the invention optimizes the usage of the decoders, i.e a decoder is never idle as long as there are more data blocks 61, 63 in the queue 71 waiting for decoding. However, if some decoders become idle, or when the number of blocks 61, 63 in the queue 71 is low, it is possible to automatically shut off any of the decoders in order to save power. Consequently, if the number of blocks in the queue 71 becomes too large, a non-active decoder can be activated automatically. In this embodiment, a controller, such as CPU 75, automatically handles the activation of the decoders. For example, any of the decoders can be activated/deactivated when the received bitrate reaches a certain predefined level. The level is a design parameter, which is based on e.g. in operator preferences in each particular case. However, as is realized by the man skilled in the art this activation/deactivation is not necessary or can be implemented differently. In the embodiment shown $N_{iter}=15$ was chosen as an example, and as a result some data blocks will expire and be transmitted to the back of the queue 71 before they reach the decoder. However, any other

reasonable number of iterations in the decoders is equally well possible within the scope of the invention.

As is understood, the overall operation of the mobile telephone and the exchanging of data blocks 61, 62 are well known in the art and therefore will not be further discussed in this document. The operation of the queue 71 and the cluster of the decoders, such as queue handling and adaptation of the number active decoders and their respective maximum number of iterations in the decoders can be provided by the same CPU 75, which can be any commercially available microprocessor or programmable logic circuitry.

The invention has been described above with reference to some embodiments. However, other embodiments than the ones referred to above are equally well possible within the scope of the invention, which is best defined by the appended independent claims.

1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100

CLAIMS

1. A method for scheduling a decoding process of coded data blocks (61) transmitted over a wireless link (20) in a communication network (21) characterized in that
5 the coded data block (61) is stored in a queue (71) if all decoders of a cluster (72) of iterative decoders are unavailable, and the first decoder being available receives the coded data block (61).
- 10 2. The method according to claim 1, wherein the iterative decoders of the cluster (72) are arranged in parallel.
- 15 3. The method according to claim 1 or 2, wherein the transmission between a physical layer (36) of a stack of protocols in a communication apparatus (1) and a physical layer (46) of a stack of protocols in a communication network (21) is controlled by a protocol (51) requiring an
20 ACK/NACK-report of the transmission within a predetermined time limit.
- 25 4. The method according to claim 3, wherein a NACK-report is transmitted to the transmitter of the data block (61) if the time limit is reached before the stored data block (61) is moved to any of the decoders of the cluster (72).
- 30 5. The method according any of the claims 3-4, wherein an ACK-report is transmitted to the transmitter of the data block (61) if said block (61) is successfully decoded in any of the decoders of the cluster (72) within the time limit.
- 35 6. The method according to any of the claims 3-5, wherein the NACK-report is transmitted to the transmitter

of the data block (61) if said block (61) is unsuccessfully decoded in any of the decoders of the cluster (72) within the time limit.

5 7. The method according to any of the claims 3-6, wherein the NACK-report is transmitted to the transmitter of the data block (61) if the decoding of said block (61) in any of the decoders of the cluster (72) is not finished within the time limit.

10

8. The method according to any of the claims 3-4 or 6-7, wherein the data block (61) is moved into the end of the queue (71).

15 9. The method according to claim 8, wherein the data block (61) is combined with a retransmitted data block (62) to a combined data block (63) and stored in the queue (72).

20 10. The method according to claim 9, wherein the combined data block (63) is processed according to any of the claims 5-11.

25 11. The method according to any of the proceeding claims, wherein the data blocks (61, 63) are moved from the queue (71) to any of the decoders of the cluster (72) according to a First In First Out (FIFO) principle.

30 12. The method according to any of the claims 1-10, wherein the data blocks (61, 63) are moved from the queue (71) to any of the decoders of the cluster (72) according to an "oldest data block first" principle.

35 13. The method according to any of the proceeding claims, wherein the maximum number of iterations in each decoder is decreased, or increased, automatically by the

CPU 75 when the number of blocks (61, 63) being moved directly from the beginning to the end of the queue (71) reaches predefined indices.

5 14. The method according to any of the proceeding claims, wherein the decoders is activated automatically by the CPU 75 when the bitrate of the received stream of data blocks (61, 62) reaches certain predefined levels.

10 15. An electronic communication apparatus (1) capable of decoding data blocks (61) received over a wireless link (20) in a communication network (21), characterized in that the communication apparatus (1) comprises a queue (71), which is adapted for temporarily storing the data
15 blocks (61), and a cluster (72) of decoders, which is adapted to decode the data blocks (61) when any of the decoders of the cluster (72) is available.

20 16. The electronic communication apparatus according to claim 15, wherein the decoders of the cluster (72) are arranged in parallel.

25 17. The electronic communication apparatus according to any of the claims 15 or 16, wherein said apparatus (1) comprises a receiver, which is adapted for receiving the data blocks (61, 62) with a bitrate of up to at least 15 Mbps.

30 18. The electronic communication apparatus according to any of the claims 15-17, wherein said apparatus (1) is adapted to receive the data blocks (61, 62) according to a protocol requiring a ACK/NACK-report within a predetermined time limit.

19. The electronic communication apparatus according to claim 18, wherein said apparatus (1) is adapted for transmitting a NACK-report to a transmitter of the data block (61) if said block (61) is not moved to any of the decoders of the cluster (72) within the time limit.

20. The electronic communication apparatus according to any of the claims 18 or 19, wherein said apparatus (1) is adapted for transmitting an ACK-report to the transmitter of the data block (61) if said block (61) is successfully decoded in any of the decoders of the cluster (72) within the time limit.

21. The electronic communication apparatus according to any of the claims 18-20, wherein said apparatus (1) is adapted for transmitting a NACK-report to the transmitter of the data block (61) if said block (61) is unsuccessfully decoded in any of the decoders of the cluster (72) within the time limit.

22. The electronic communication apparatus according to any of the claims 18-21, wherein said apparatus (1) is adapted for transmitting a NACK-report to the transmitter of the data block (61) if the decoding of said block (61) in any of the decoders of the cluster (72) can not be finished within the time limit.

23. The electronic communication apparatus according to any of the claims 15-22, wherein said apparatus (1) further comprises feedback loops (73, 74) between the beginning of the queue (71) and the end of the queue (71), and between the cluster of decoders (72) and the end of the queue (71), and wherein said apparatus (1) is adapted for moving the data block (61) to the end of the queue (71)

when the decoding process is not initiated or successfully completed.

24. The electronic communication apparatus according
5 to any of the claims 15-23, wherein said apparatus (1) is adapted for receiving a retransmitted data block (62), combining the retransmitted data block (62) with a stored data block (61) to a combined data block (63), and storing the combined data block (63).

10

25. The electronic communication apparatus according to claim 24, wherein said apparatus (1) is adapted to process the combined data block (63) according to any of the claims 20-25.

15

26. The electronic communication apparatus according to any of the claims 15-27, wherein the queue (71) is provided as a rewritable memory.

20

27. The electronic communication apparatus according to any of the claims 15-26, wherein a controller (75) of the apparatus (1) is adapted to automatically adapt the number of active decoders when the bitrate of the received stream of data blocks (61, 62) reaches certain predefined
25 levels, and wherein said controller (75) is adapted to automatically decreased, or increased, the maximum number of iterations in each decoder when the number of blocks (61, 63) being moved directly from the beginning to the end of the queue (71) reaches predefined indices.

30

28. The method according to any of the claims 15-27, wherein apparatus (1) is further adapted to move the data blocks (61, 63) from the queue (71) to any of the decoders of the cluster (72) according to a First In First Out
35 (FIFO) principle.


Summary

A method for scheduling a decoding process of coded data blocks transmitted over a link in a communication network. According to the method the coded data block is stored in a queue (71) if all decoders of a cluster (72) of iterative parallel decoders are unavailable. When any of the decoders of the cluster (72) is available the first coded block of the queue (71) is moved to that decoder. Also, according to the method it is possible to combine a stored coded block with a retransmitted coded block, which is decoded with an increased probability for successful decoding. Also, the invention relates to a communication apparatus adapted for carrying out the method according to the invention.

15

To be published together with FIG 3.

9
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176

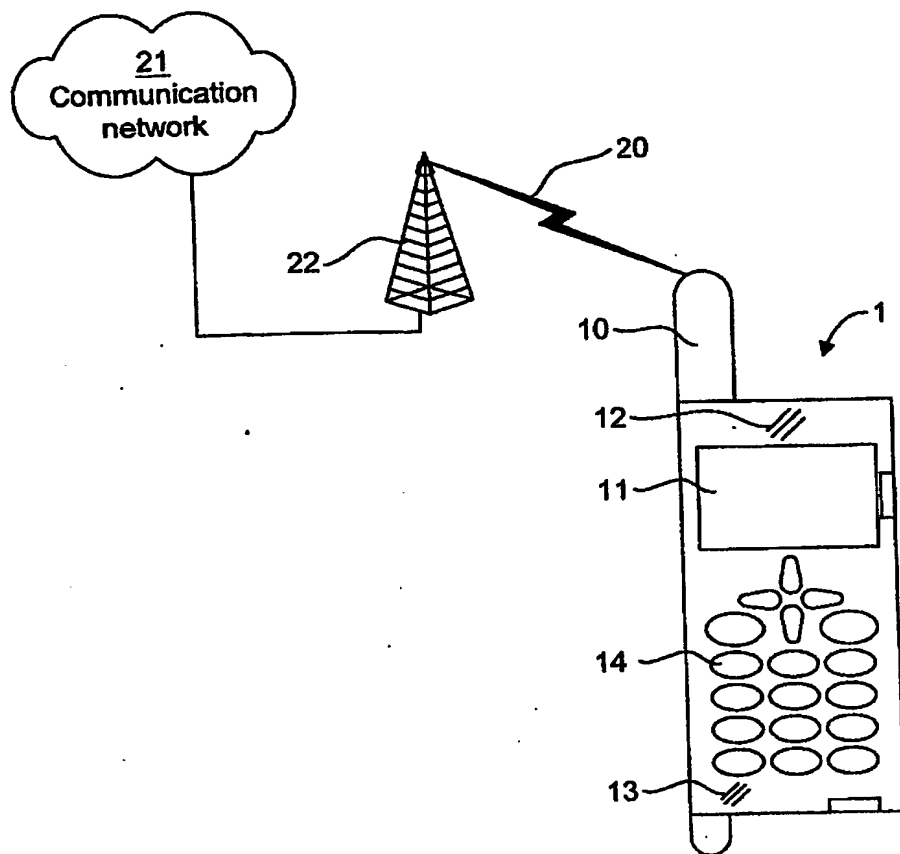

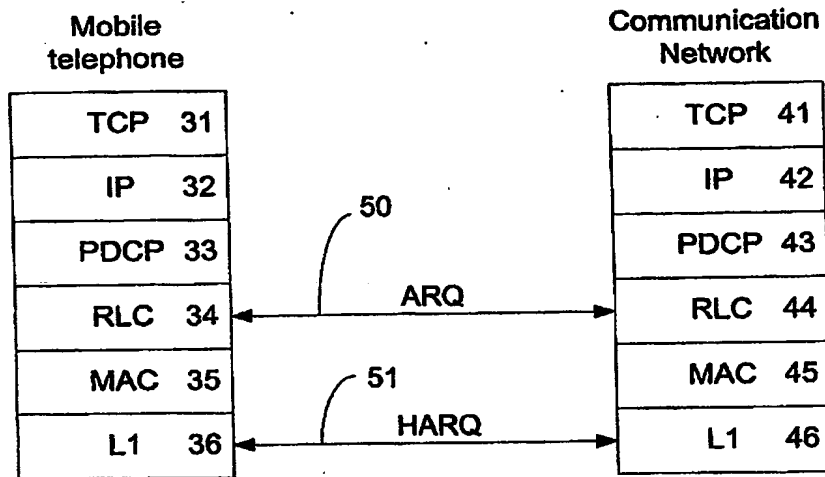


FIG 2

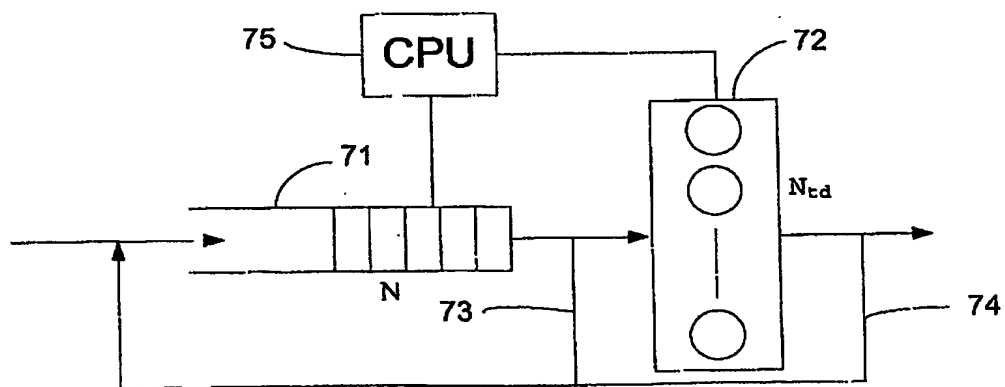


FIG 3

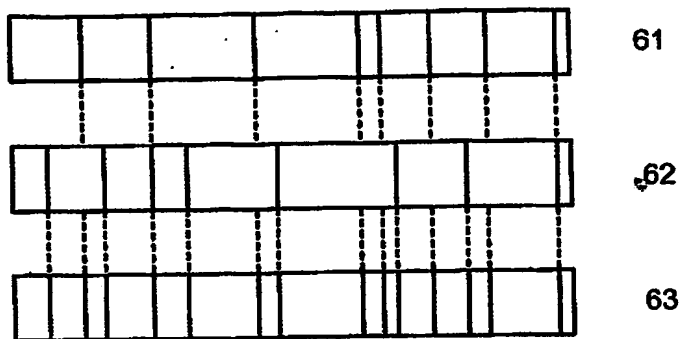


FIG 4

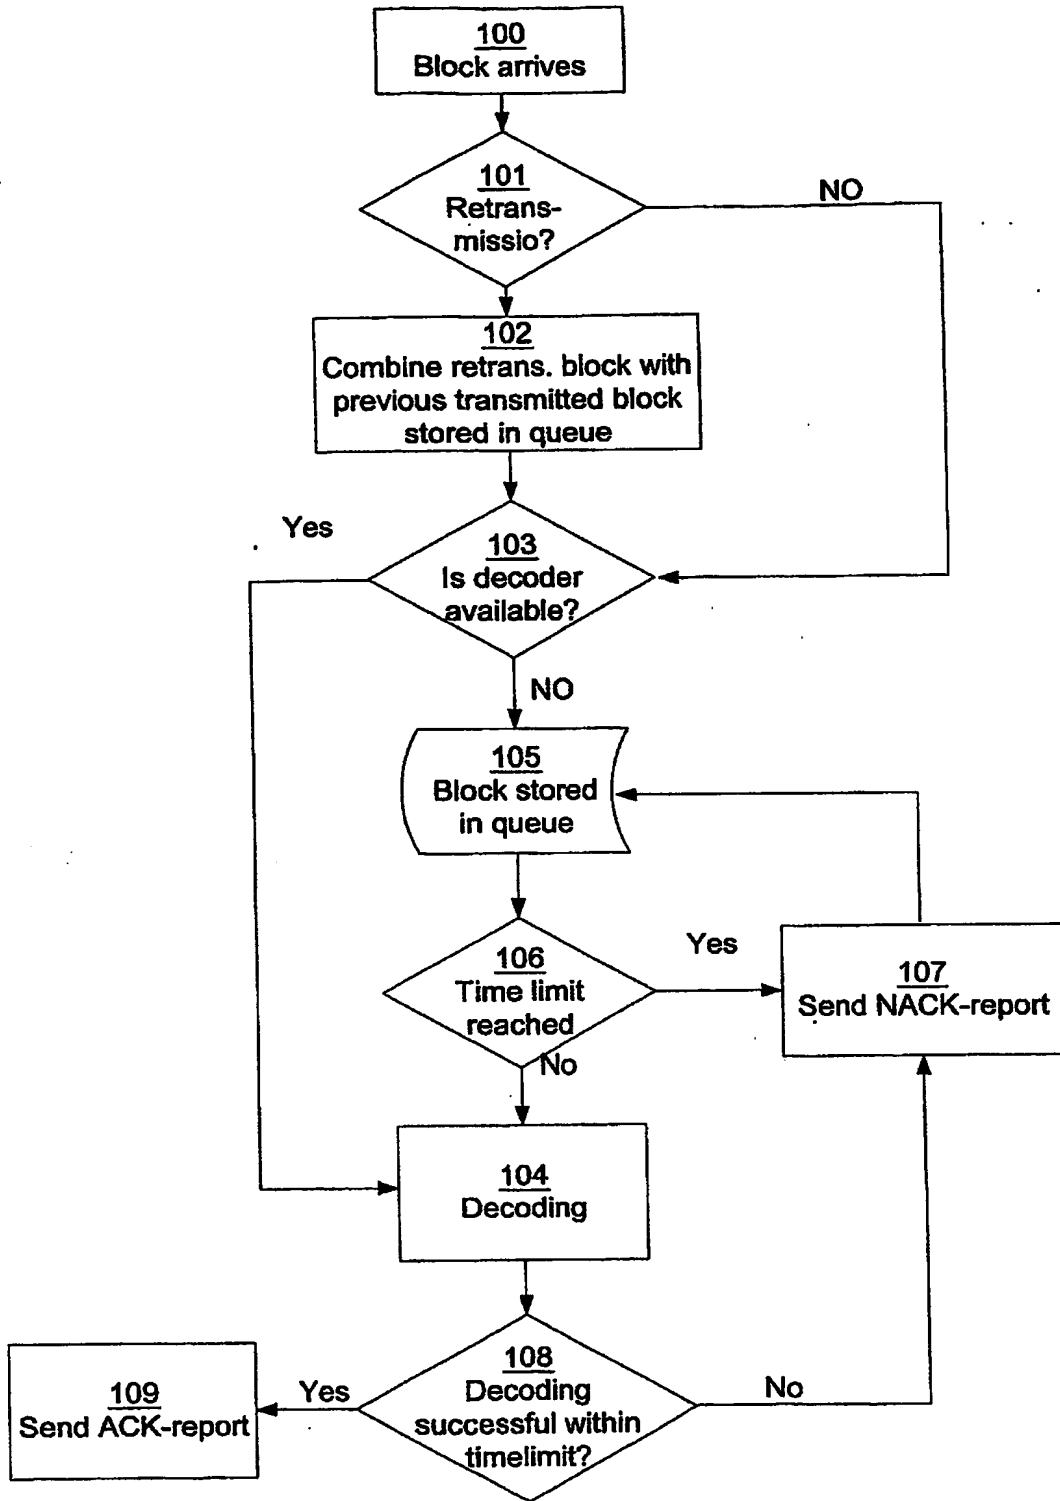


FIG 5

5/5

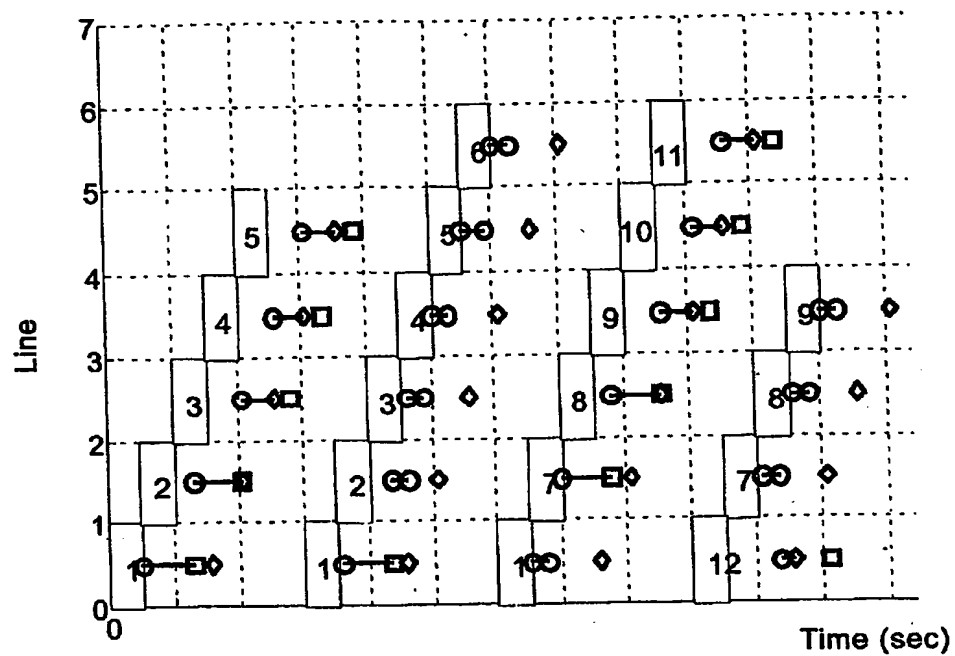


FIG 6